

GRADING AND DRAINAGE NOTES

ON-SITE GRADING & DRAINAGE PLANS

PROJECT STREET ADDRESS: _____

BUILDING PERMIT NO. 20__ - _____

ASSESSORS PARCEL NO. _____

TRACT NO. _____ / PARCEL MAP _____

1. CALIFORNIA BUILDING CODE

ALL WORK SHALL COMPLY WITH THE 2013 CALIFORNIA BUILDING CODE.

2. O.S.H.A. REGULATIONS

ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH APPLICABLE O.S.H.A. REGULATIONS.

3. GEOTECHNICAL (SOILS) REPORT

THE ENGINEER OF WORK HAS DESIGNED THIS PROJECT TO COMPLY WITH THE GRADING RECOMMENDATIONS IN THE PROJECT GEOTECHNICAL (SOILS) REPORT PREPARED BY _____ DATED _____ PROJECT NO. _____

4. SPECIFICATIONS AND OBSERVATIONS

ALL GRADING AND DRAINAGE WORK SHALL CONFORM TO APPROVED SPECIFICATIONS PRESENTED HEREON. ALL GRADING WORK SHALL BE OBSERVED AND APPROVED BY THE SOILS ENGINEER OR ENGINEER OF WORK. THE SOILS ENGINEER/ENGINEER OF WORK AND CITY (866-2150) SHALL BE NOTIFIED AT LEAST 48 HOURS BEFORE BEGINNING ANY GRADING. UNAPPROVED GRADING WORK SHALL BE REMOVED AND REPLACED UNDER OBSERVATION.

5. NATIONAL POLLUTION DISCHARGE ELIMINATION SYSTEM

PRIOR TO ISSUANCE OF ANY GRADING OR BUILDING PERMITS, THE APPLICANT SHALL COMPLY WITH THE NATIONAL POLLUTION DISCHARGE ELIMINATION SYSTEM (NPDES) PERMITTING REQUIREMENTS AND THE CALIFORNIA STORM WATER BEST MANAGEMENT PRACTICES HANDBOOK PREPARED BY THE STORM WATER QUALITY TASK FORCE, SANTA CLARA VALLEY WATER DISTRICT AND THE CITY OF CAMPBELL MUNICIPAL CODE REGARDING STORM WATER POLLUTION PREVENTION.

6. LOCAL NON-POINT SOURCE ORDINANCE

COMPLIANCE WITH THE LOCAL NON-POINT SOURCE ORDINANCE CONCERNING DISCHARGE OF MATERIALS TO THE STORM DRAINAGE SYSTEM SHALL BE THE RESPONSIBILITY OF THE GRADING CONTRACTOR.

7. UNDERGROUND UTILITIES AND STRUCTURES

THE EXISTENCE AND APPROXIMATE LOCATIONS OF UNDERGROUND UTILITIES AND STRUCTURES SHOWN ON THESE PLANS WERE DETERMINED BY THE ENGINEER OF WORK BY SEARCHING THE AVAILABLE PUBLIC RECORDS. THEY ARE SHOWN FOR GENERAL INFORMATION ONLY. THE CITY OF CAMPBELL MAKES NO CLAIMS OF THE ACCURACY OR COMPLETENESS OF THE INFORMATION SHOWN. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY UTILITY LOCATIONS WITH THE APPROPRIATE AGENCY. THE CONTRACTOR IS REQUIRED TO TAKE DUE PRECAUTIONARY MEASURES TO PROTECT THE UTILITIES, STRUCTURES AND ANY OTHER IMPROVEMENTS FOUND AT THE WORK SITE.

8. EROSION CONTROL

EROSION CONTROL PLANTING AND OTHER SILT RETENTION OR EROSION CONTROL MEASURES MAY BE REQUIRED IN ALL GRADED AREAS. SEE LANDSCAPE PLAN, IF APPLICABLE, FOR DETAILS OF PLANTING.

9. UTILITY ELEVATION VERIFICATION

THE CONTRACTOR SHALL VERIFY ALL EXISTING INVERT ELEVATIONS FOR DISCREPANCIES EXIST BETWEEN THE ACTUAL ELEVATIONS AND STORM DRAIN CONSTRUCTION PRIOR TO ANY SITE WORK. SHOULD LOCATIONS OF EXISTING STORM DRAIN CONNECTIONS AND THOSE AS SHOWN ON THESE PLANS, THE CONTRACTOR SHALL NOTIFY ENGINEER OF WORK BEFORE ADJUSTING THE DESIGN.

10. UTILITY CROSSINGS

THE CONTRACTOR SHALL UNCOVER AND EXPOSE ALL EXISTING UTILITY, SEWER AND STORM DRAIN LINES WHERE THEY ARE TO BE CROSSED ABOVE OR BELOW BY THE NEW FACILITY BEING CONSTRUCTED IN ORDER TO VERIFY THE GRADE AND TO ASSURE THAT THERE IS SUFFICIENT CLEARANCE. HE OR SHE SHALL CALL THE ENGINEER OF WORK REGARDING POTENTIAL CONFLICTS BEFORE FIELD WORK BEGINS.

11. GRADING REQUIREMENTS

DRAINAGE, INCLUDING ALL ROOF AND PATIO DRAINS, SHALL BE DIRECTED AWAY FROM THE STRUCTURE. IT SHALL BE THE OWNER'S AND CONTRACTOR'S RESPONSIBILITY TO ENSURE THAT THE DRAINAGE SYSTEM FACILITIES SHOWN HEREON ARE KEPT CLEAR OF OBSTRUCTIONS AND THE CONTRACTOR SHALL REGRADE AREAS THAT WILL NOT DRAIN AFTER FINAL GRADING. THE GROUND ADJACENT TO THE BUILDING SHALL SLOPE AWAY WITH A MINIMUM SLOPE OF 2% FOR AT LEAST 5 FEET. MINIMUM SLOPE IN ALL OTHER CASES SHALL BE NO LESS THAN 1%.

12. GRADED SITE ELEVATIONS

ON GRADED SITES, THE TOP OF ANY EXTERIOR FOUNDATION SHALL EXTEND ABOVE THE ELEVATION OF THE STREET GUTTER AT POINT OF DISCHARGE OR THE INLET OF AN APPROVED DRAINAGE DEVICE A MINIMUM OF 12 INCHES (305 MM) PLUS 2 PERCENT. THE BUILDING OFFICIAL MAY APPROVE ALTERNATE ELEVATIONS, PROVIDED IT CAN BE DEMONSTRATED THAT REQUIRED DRAINAGE TO THE POINT OF DISCHARGE AND AWAY FROM THE STRUCTURE IS PROVIDED AT ALL LOCATIONS ON THE SITE.

13. CLEAN, SAFE AND USABLE PUBLIC RIGHT-OF-WAY AND PRIVATE PROPERTY

THE PERMITTEE SHALL MAINTAIN THE STREETS, SIDEWALKS AND ALL OTHER PUBLIC RIGHTS-OF-WAY IN A CLEAN, SAFE AND USABLE CONDITION. ALL SPILLS OF SOIL, ROCK OR CONSTRUCTION DEBRIS SHALL BE REMOVED FROM THE PUBLICLY OWNED PROPERTY DURING CONSTRUCTION AND UPON COMPLETION OF THE PROJECT. ALL ADJACENT PROPERTY, PRIVATE OR PUBLIC SHALL BE MAINTAINED IN A CLEAN, SAFE AND USABLE CONDITION.

14. TOPOGRAPHY SURVEY

THE TOPOGRAPHY SURVEY MADE BY _____ ON _____

15. TREE REMOVAL AND PRESERVATION

THIS PLAN DOES NOT APPROVE REMOVAL OF TREES. APPROPRIATE TREE REMOVAL PERMITS AND METHOD OF TREE PRESERVATION SHOULD BE OBTAINED FROM THE PLANNING DIVISION.

16. PROJECT PLANS

THIS PLAN IS A PART OF PROJECT PLANS. SEE ARCHITECT AND LANDSCAPE PLANS, IF APPLICABLE, FOR DETAILS AND DIMENSIONS. FENCES AND WALLS ARE NOT A PART OF THESE PLANS.

17. FINAL LETTER OF INSPECTION

THE SOILS ENGINEER OR ENGINEER OF WORK SHALL PROVIDE FINAL LETTER OF INSPECTION AT COMPLETION OF THE GRADING.

18. GRADE EVENLY

THE CONTRACTOR SHALL GRADE EVENLY BETWEEN SPOT ELEVATIONS SHOWN.

19. APPROVAL OF PLANS

APPROVAL OF THIS PLAN APPLIES ONLY TO THE EXCAVATION, PLACEMENT, AND COMPACTION OF NATURAL EARTH MATERIALS. THIS APPROVAL DOES NOT CONFER ANY RIGHTS OF ENTRY TO EITHER PUBLIC PROPERTY OR THE PRIVATE PROPERTY OF OTHERS. APPROVAL OF THIS PLAN ALSO DOES NOT CONSTITUTE APPROVAL OF ANY IMPROVEMENTS, PROPOSED IMPROVEMENTS ARE SUBJECT TO REVIEW AND APPROVAL BY THE RESPONSIBLE AUTHORITIES AND ALL OTHER REQUIRED PERMITS SHALL BE OBTAINED.

20. WELL LOCATIONS

ALL KNOWN WELL LOCATIONS ON THE SITE HAVE BEEN INCLUDED AND SUCH WELLS SHALL BE MAINTAINED OR ABANDONED ACCORDING TO CURRENT REGULATIONS ADMINISTERED BY THE SANTA CLARA VALLEY WATER DISTRICT. CALL (408) 265-2600 EXTENSION 382 TO ARRANGE FOR DISTRICT OBSERVATIONS OF ALL WELL ABANDONMENTS.

21. EARTHWORK QUANTITIES

THE EARTHWORK QUANTITIES SHOWN ON THESE PLANS ARE ONLY TO BE USED TO DETERMINE THE GRADING PLAN REVIEW AND PERMIT FEES.

22. ELEVATION ADJUSTMENTS

ADJUSTMENTS OF PADS OR PARKING LOT ELEVATIONS TO ACHIEVE EARTHWORK BALANCE SHALL BE MADE ONLY WITH APPROVAL OF THE ENGINEER OF WORK AND THE CITY OF CAMPBELL BUILDING DIVISION.

23. TRUCK ROUTE

THE TRUCK ROUTE SHALL BE _____

24. CONTRACTOR RESPONSIBILITIES

THE SOILS ENGINEER AND/OR ENGINEER OF WORK WILL NOT DIRECTLY CONTROL THE PHYSICAL ACTIVITIES OF THE CONTRACTOR OR ANY SUBCONTRACTORS OF THE CONTRACTOR OR SUBCONTRACTOR'S WORKMEN'S ACCOMPLISHMENT OF WORK ON THE PROJECT. CONTRACTOR WILL BE SOLELY AND COMPLETELY RESPONSIBLE FOR WORKING CONDITIONS ON THE JOBSITE, INCLUDING SAFETY OF ALL PERSONS AND PROPERTY DURING PERFORMANCE OF THE WORK. THIS REQUIREMENT WILL APPLY CONTINUOUSLY AND NOT BE LIMITED TO NORMAL WORKING HOURS.

25. NEAT AND CLEAN PREMISES

DURING THE PROGRESS OF THE WORK, THE CONTRACTOR SHALL KEEP THE PREMISES OCCUPIED BY HIM IN A NEAT AND CLEAN CONDITION, DISPOSING OF REFUSE IN A SATISFACTORY MANNER AS OFTEN AS DIRECTED, OR AS MAY BE NECESSARY SO THAT THERE SHALL AT NO TIME BE ANY UNSIGHTLY ACCUMULATION OF RUBBISH

AGENCY INDEX

SANTA CLARA COUNTY FIRE DEPARTMENT	(408) 378-4010
CITY OF CAMPBELL - PUBLIC WORKS	(408) 866-2150
CITY OF CAMPBELL - POLICE	(408) 866-2121
SBC TELEPHONE	(408) 811-3900
PACIFIC GAS & ELECTRIC	(408) 973-8980
SAN JOSE WATER COMPANY	(408) 279-7900
SANTA CLARA VALLEY WATER DISTRICT	(408) 265-2600
COMCAST CABLE TELEVISION	(408) 452-9100
WEST VALLEY SANITATION DISTRICT	(408) 378-2407

26. ANY ABANDONED UNDERGROUND PIPES

ANY ABANDONED UNDERGROUND PIPES EXPOSED DURING CONSTRUCTION SHALL BE REMOVED ADEQUATELY PLUGGED, OR A COMBINATION OF BOTH IN ACCORDANCE WITH THE REQUIREMENTS OF THE CITY OF CAMPBELL, BUILDING DIVISION.

27. HUMAN REMAINS

IF HUMAN REMAINS ARE DISCOVERED DURING THE CONSTRUCTION, UNLESS THE CORONER HAS NOTIFIED THE PERMITTEE IN WRITING THAT THE REMAINS DISCOVERED HAVE BEEN DETERMINED NOT TO BE NATIVE AMERICAN, THE PERMITTEE SHALL NOTIFY ALL PERSONS ON THE CITY'S NATIVE AMERICAN NOTIFICATION LIST OF SUCH DISCOVERY. SUCH NOTIFICATION SHALL BE SENT BY FIRST CLASS U.S. MAIL WITHIN SEVEN (7) DAYS OF THE DATE ON WHICH THE PERMITTEE NOTIFIED THE CORONER AND SHALL STATE THAT THE CORONER HAS BEEN NOTIFIED IN ACCORDANCE WITH CALIFORNIA STATE LAW.

28. MAINTENANCE PROCEDURES

THE CONTRACTOR SHALL ADVISE THE OWNER OF APPROPRIATE MAINTENANCE PROCEDURES OF THE DRAINAGE SYSTEMS.

29. DUST CONTROL

ALL EXPOSED OR DISTURBED SOIL SURFACES SHALL BE WATERED AS NECESSARY, BUT NOT LESS THAN TWICE DAILY TO CONTROL DUST. AREAS OF DIGGING AND GRADING OPERATIONS SHALL BE CONSISTENTLY WATERED TO CONTROL DUST. GRADING OR OTHER DUST-PRODUCING ACTIVITIES SHALL BE SUSPENDED DURING PERIODS OF HIGH WIND WHEN DUST IS READILY VISIBLE IN THE AIR. STOCKPILES OF SOIL, DEBRIS, SAND, OR OTHER DUST-PRODUCING MATERIALS SHALL BE WATERED OR COVERED. THE CONSTRUCTION AREA AND THE SURROUNDING STREETS SHALL BE SWEEPED (NO WATER) AS NECESSARY, BUT NOT LESS THAN TWICE DAILY.

30. CONSTRUCTION MITIGATION MEASURE

HOURS OF CONSTRUCTION SHALL BE LIMITED TO 8:00 A.M. TO 5:00 P.M. MONDAY THROUGH FRIDAY, AND 9:00 A.M. TO 4:00 P.M. ON SATURDAY. CONSTRUCTION ACTIVITIES SHALL NOT TAKE PLACE ON SUNDAYS AND HOLIDAYS.

31. CONSTRUCTION PERIMETER RETENTION WALLS


ALL PROPERTY LINE RETENTION WALLS SHALL BE MADE OF CONCRETE OR MASONRY.

32. STORMWATER TREATMENT FACILITIES

ALL STORMWATER TREATMENT FACILITIES REQUIRE PUBLIC WORKS INSPECTIONS. CALL 408-866-2150 TO SCHEDULE INSPECTIONS 48-HOURS PRIOR.



CITY OF CAMPBELL DEPARTMENT OF PUBLIC WORKS

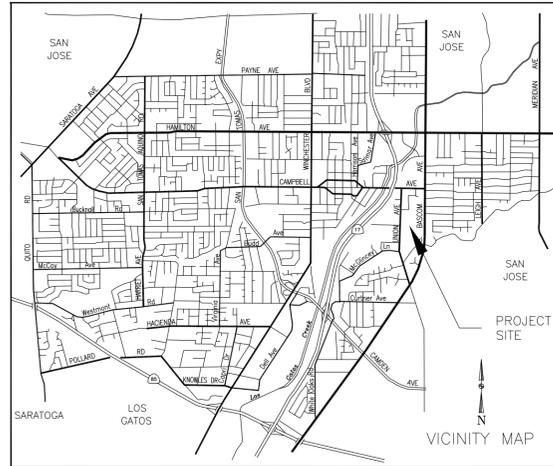

ABBREVIATIONS

AB	AGGREGATE BASE	LOL	LAYOUT LINE
AC	ASPHALT CONCRETE	MAX	MAXIMUM
BC	BEGIN CURVE	MH	MANHOLE
BCR	BEGIN CURB RETURN	MIN	MINIMUM
CL	CLASS	OG	ORIGINAL GRADE
DIA	DIAMETER	PB	PULL BOX
DVY	DRIVEWAY	PCC	PORTLAND CEMENT CONCRETE
EC	END CURVE	PVC	POLYVINYL CHLORIDE
ECR	END CURB RETURN	R	RADIUS
ED	EDGE DRAIN	RCP	REINFORCED CONCRETE PIPE
EX	EXISTING	R/W	RIGHT-OF-WAY
FC	FACE OF CURB	STA	STATION
FG	FINISH GRADE	SW	SIDEWALK
FH	FIRE HYDRANT	TC	TOP OF CURB
INV	INVERT	TEMP	TEMPORARY
IRR	IRRIGATION	TYP	TYPICAL

CITY OF CAMPBELL
PLANNING DIVISION CLEARANCE

PLAN CHECK # _____

APPROVED BY: _____

DATE: _____

THESE PLANS HAVE BEEN REVIEWED AND FOUND TO BE IN SUBSTANTIAL CONFORMANCE WITH THE INTENT AND PURPOSE OF THE GEOTECHNICAL EXPLORATION REPORT ON _____ IN CAMPBELL, CALIFORNIA, PROJECT NO. _____, DATED _____, PREPARED BY _____

(NAME) _____ DATE _____
G.E. # _____

REGISTERED PROFESSIONAL ENGINEER
RONALD R. MCCOY, C.D.
GE00000
EXP. _____
STATE OF CALIFORNIA

BY: _____ DATE: _____

Earthwork Quantities

FILL:	CY
CUT:	CY
IMPORT:	CY
EXPORT:	CY

CITY OF CAMPBELL
PUBLIC WORKS DEPARTMENT CLEARANCE

THIS PLAN WITH ATTACHED DOCUMENTS HAS BEEN REVIEWED FOR COMPLIANCE WITH THE CITY OF CAMPBELL AND STATE OF CALIFORNIA CODES AND THE CURRENT NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM (NPDES) PERMIT. THIS PLAN SHALL NOT BE CHANGED OR MODIFIED WITHOUT AUTHORIZATION FROM THE BUILDING OFFICIAL. WORK PERFORMED RELATED TO THIS PLAN SHALL BE DONE IN ACCORDANCE WITH THIS PLAN AND ALL APPLICABLE CODES. THIS APPROVAL SHALL NOT BE HELD TO PERMIT OR UNDERSTOOD AS TO BE AN APPROVAL OF A VIOLATION OF ANY CITY OR STATE LAW.

BY: _____ DATE: _____

INDEX OF DRAWINGS

TITLE	SHEET
TITLE SHEET	1
TOPOGRAPHIC SURVEY AND DEMOLITION PLAN	2
GRADING AND DRAINAGE PLAN	3
COMPOSITE UTILITY PLAN	4
STORM WATER MANAGEMENT PLAN	5
DETAILS	6
EROSION CONTROL PLAN	7
BLUE PRINT FOR A CLEAN BAY	8

LEGEND

EXISTING	PROPOSED
SIDEWALK, CURB AND GUTTER	
CENTER LINE	
PROPERTY LINE	
EDGE OF PAVEMENT	
DRIVEWAY	
PCC OR AC REMOVAL	
STANDARD CITY MONUMENT	
BENCH MARK	
MANHOLE	
STORM DRAIN INLET	
WATER METER	
VALVE	
FIRE HYDRANT	
STREET LIGHT	
POWER POLE	
PULL BOX	
CABLE TELEVISION LINE	
ELECTRICAL LINE	
IRRIGATION LINE	
NATURAL GAS LINE	
OVERHEAD LINE	
SANITARY SEWER LINE	
STORM DRAIN LINE	
TELEPHONE LINE	
WATER LINE	
TRAFFIC SIGNAL CONDUIT	
LIGHTING CONDUIT	
ROADSIDE SIGN & SIGN CODE	
FENCE	
TREE/SHRUB	

BENCHMARK

ELEVATION: _____
LOCATION: _____
DESCRIPTION: _____

SEAL OF ENGINEER OF WORK:

I HEREBY DECLARE THAT I AM THE ENGINEER OF WORK FOR THIS PROJECT, THAT I HAVE EXERCISED RESPONSIBLE CHARGE OVER THE DESIGN OF THE PROJECT AS DEFINED IN SECTION 6703 OF THE BUSINESS AND PROFESSIONS CODES, AND THAT THE DESIGN IS CONSISTENT WITH CURRENT STANDARDS.

THE DESIGN SHOWN HEREON IS NECESSARY AND REASONABLE AND DOES NOT RESTRICT ANY HISTORIC DRAINAGE FLOWS FROM ADJACENT PROPERTIES NOR INCREASE DRAINAGE TO ADJACENT PROPERTIES.

THE DESIGN INCLUDES PRINCIPLES AND TECHNIQUES TO REDUCE QUANTITY AND IMPROVE THE QUALITY OF STORM WATER RUNOFF, AS REQUIRED BY NPDES.

I UNDERSTAND THAT THE CHECK OF PROJECT DRAWINGS AND SPECIFICATIONS BY THE CITY OF CAMPBELL IS CONFINED TO A REVIEW ONLY AND DOES NOT RELIEVE ME, AS ENGINEER OF WORK, OF MY RESPONSIBILITIES FOR PROJECT DESIGN.

SIGNATURE _____ P.E. _____ SEAL _____

PRINT _____

FIRM ADDRESS TELEPHONE _____

TITLE SHEET GRADING AND DRAINAGE PLANS PROJECT ADDRESS _____ PARCEL/TRACT MAP NO. XX BUILDING PERMIT NO. 20__ - _____
 CONSULTANT LOGO
 SCALE: N.T.S.
 SHEET: 1 OF XX